

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number
WO 2004/045885 A1

(51) International Patent Classification⁷: B60K 23/08

(21) International Application Number:
PCT/KR2003/002423

(22) International Filing Date:
12 November 2003 (12.11.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2002-0071732
18 November 2002 (18.11.2002) KR

(71) Applicant (for all designated States except US): DY-MOS INCORPORATED [KR/KR]; 470-1, Pyeongni, Seongyeon-myeon, Seosan-si, 356-851 Chungcheongnam-do (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CHOI, Min-Sik [KR/KR]; 103-1301, Buyoung Apt, Eumnae-dong,

Seosan-si, 356-020 Chungcheongnam-do (KR). KIM, Young-Soo [KR/KR]; 113-802, Samsung Apt, Jukseong-dong, Seosan-si, 356 - 090 Chungcheongnam-do (KR). BONG, Woo-Jong [KR/KR]; #246-5, Sungsan-dong, Mapho-gu, 121-847 Seoul (KR).


(74) Agent: KIM, Won-Sik; #313, Geosong Bldg., Yeoksam-dong, Gangnam-gu, 135-080 Seoul (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: ELECTRONIC GEARSHIFT APPARATUS OF SUB GEARSHIFT FOR 4 WHEEL DRIVE VEHICLE

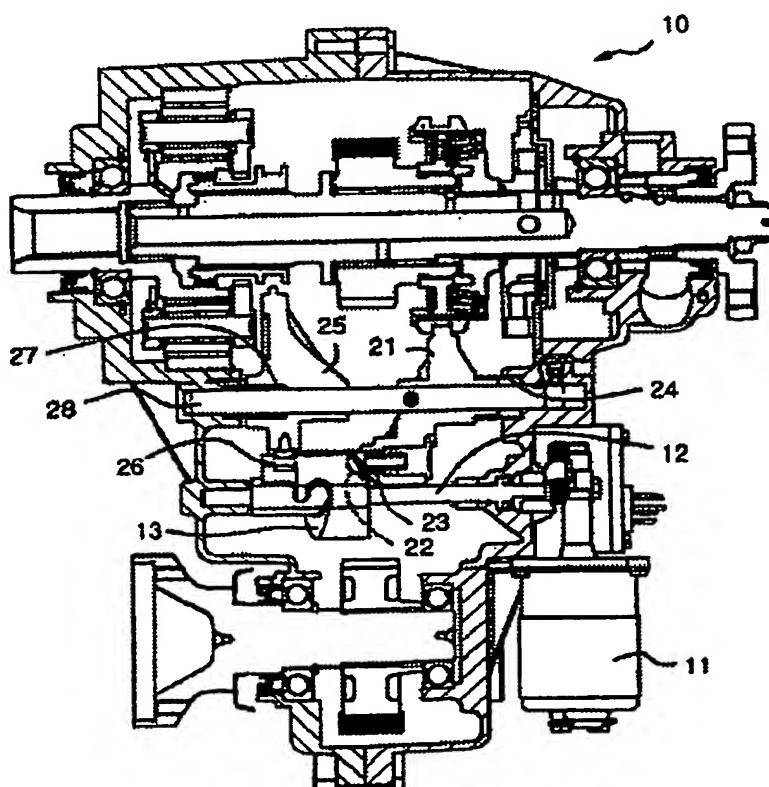

(57) Abstract: An electronic gearshift device of a transfer case assembly for a four wheel drive vehicle is provided. The electric gearshift device comprises a motor; a camshaft rotatably driven by the motor; a rail member separated from the camshaft by a predetermined distance and positioned parallel to the camshaft; first and second forks installed on the rail member such that they are spaced apart from each other; and a cam fitted around and supported by the camshaft to selectively operate the first or second forks on the rail member to thereby effect gearshift.



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*